


SPECIFICATION:

JOSAM 32160-62 SERIES COATED CAST IRON FLOOR DRAIN WITH DOUBLE DRAINAGE FLANGE, WEJLOC COLLAR, WEEP-HOLES, BOTTOM OUTLET, INSIDE CAULK CONNECTION, ROUND TOP, HEAVY-DUTY LOOSE-SET TRACTOR GRATE, AND CLOSURE PLUG WITH "T HANDLE.

FLOOR DRAIN
9" ROUND TRACTOR TOP
WITH PLUG

SERIES **32160-62**

SLOT WIDTH 3/8"
 MEETS ADA
 GRATE FREE AREA: 15 SQ. IN.

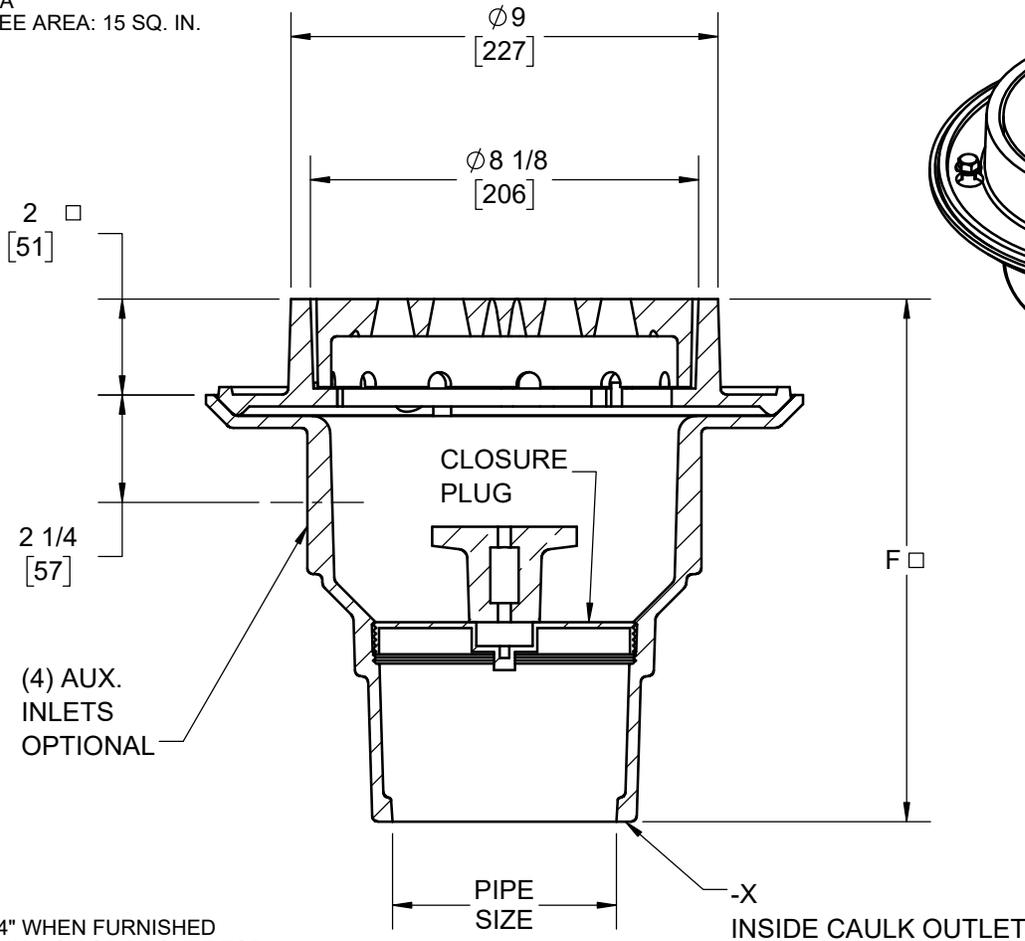

□ ADD 1/4" WHEN FURNISHED WITH NIKALOY OR BRONZE TOP

3"	PIPE SIZE ("F" DIM. = 10 - 7/8")			-54-92	2" AUXILIARY SPIGOT INLET, GALVANIZED
4"	PIPE SIZE ("F" DIM. = 11 - 1/4")				
-7	DUCTILE IRON GRATE			-66	NO-HUB SIDE OUTLET
-12	SQUARE TOP, CAST IRON				
-15	CHAINED GRATE				
-19	CAST IRON UNDERGRATE W/SATINFINISH NIKALOY TOP				
-44	FIXED EXTENSION COLLAR (3" STD. OR SPECIFY HT.)			-92	GALVANIZED CAST IRON PARTS
-49	3/4" PRIMER TAP			-TSI	TRAP SEAL INSERT
-50	1/2" PRIMER TAP			-ARE	ACID-RESISTING EPOXY
-51	1-1/2" AUXILIARY THREADED INLET			-92	GALVANIZED CAST IRON PARTS
-52	2" AUXILIARY THREADED INLET			-ARE	ACID RESISTANT EPOXY COATING
-53	2" AUXILIARY HUB INLET			-VP	SECURED GRATE, VANDAL-PROOF SCREWS
-54	2" AUXILIARY SPIGOT INLET				
-53-92	2" AUXILIARY HUB INLET, GALVANIZED		X	-X	INSIDE CAULK OUTLET

DATE OF LAST CHANGE: 09/07/22

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.



MICHIGAN CITY, INDIANA

NOTES

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov