

SPECIFICATION:

JOSAM SERIES 46800 FABRICATED STAINLESS STEEL (TYPE 304, 2mm THK) (14 ga) , 16" WIDE, V-SHAPED BOTTOM, AVAILABLE WITH OR WITHOUT SLOPE (1% STD.), WITH ANCHOR TABS AND LEVELING FEET, NO-HUB BOTTOM OUTLET AND GRATE OPTIONS.

RUN LENGTHS LONGER THAN 10' PROVIDED WITH FLANGES, GASKETS AND HARWARE.

SS TRENCH CHANNEL

16" WIDE

SERIES **46800**^(XY)

SEE 46800 TOPS DRAWING FOR GRATE DETAILS

SPECIFICATIONS:

LINEAR RUN

TOTAL RUN LENGTH (L) = _____

START HEIGHT (H1) (STD. 2-3/8" [60]) = _____

HEIGHT AT OUTLET (H2) = _____

OR STD 1% SLOPE

OUTLET AT END OF RUN

OUTLET MID-RUN (SPEC. LNPTH L1) = _____

NON-LINEAR RUN

PROVIDE SKETCH WITH CRITICAL LENGTH AND HEIGHT DIMENSIONS AND OUTLET LOCATION(S).

** WHEN -FC IS SPECIFIED, START HEIGHT (H1) IS MIN. 4" [102]

* 2" AND 3" USE FLAT STRAINER

AUTHORIZED PROJECT SIGNATURE AND DATE:




NAME:

TITLE:

SIGNATURE:

DATE:

NOTE: ALL SS TRENCH CHANNELS ARE CUSTOM FABRICATED. ORDERS ARE NON-CANCELLABLE AND NON-RETURNABLE.

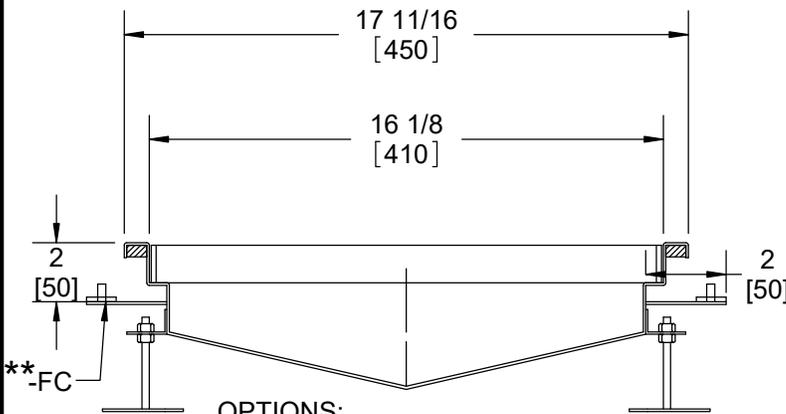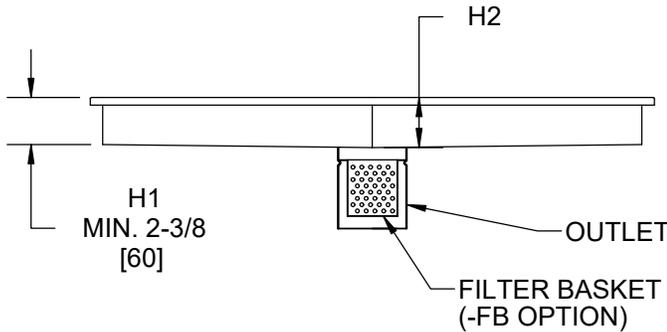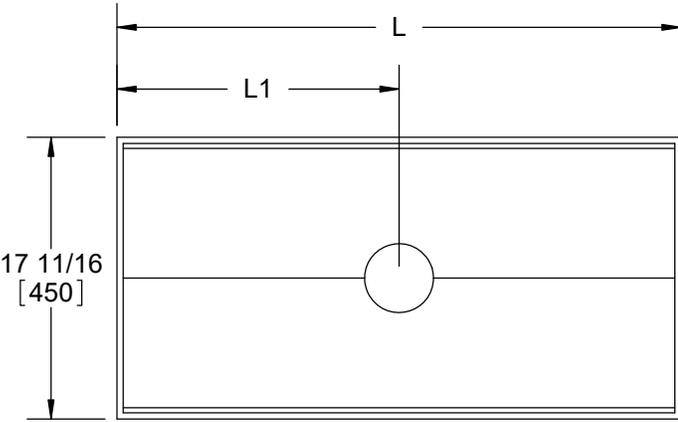

OPTIONS:

| | |
|-------|-------------------------------------|
| -FB | FILTER BASKET* |
| -SB | SEDIMENT BUCKET (N/A 2", 3") |
| -VP | SECURED GRATE |
| -316 | TYPE 316L MATERIAL |
| -BW | BUTT-WELD OUTLET (SPEC. 10, 40, 80) |
| -T | THREADED OUTLET |
| -PFO | PUSH-FIT OUTLET DIAMETER |
| -FC** | FLANGE AND CLAMP |

X = GRATE TYPE

Y = OUTLET SIZE

| | |
|---|------------------------|
| 0 | NO GRATE |
| 1 | PERFORATED SHEET GRATE |
| 2 | ANTI-SLIP MESH GRATE |
| 3 | PERIMETER SLOT GRATE |
| 4 | LADDER GRATE |

| |
|----|
| 2" |
| 3" |
| 4" |
| 6" |
| 8" |

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DATE OF LAST CHANGE: 04/10/25 BLK

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

JOSAM
MICHIGAN CITY, INDIANA

NOTES