


SPECIFICATION:

JOSAM 60100H-GRD SERIES EPOXY COATED FABRICATED STEEL GREASE INTERCEPTOR, NO-HUB CONNECTIONS, INTERNAL TRAP, REMOVABLE DIFFUSER BAFFLE, GASKETED NON-SKID CENTER BOLT COVER, FLOW CONTROL FITTING AND PDI SEAL OF APPROVAL (60104-60108 SIZES). ADJUSTABLE TIMER (1-99 DAYS) CONTROLS INTERNAL PUMP FOR REMOVAL OF GREASE TO FACTORY STORAGE TANK.

**GREASE INTERCEPTOR
WITH GREASE REMOVAL
DEVICE**

SERIES **60100H-GRD**

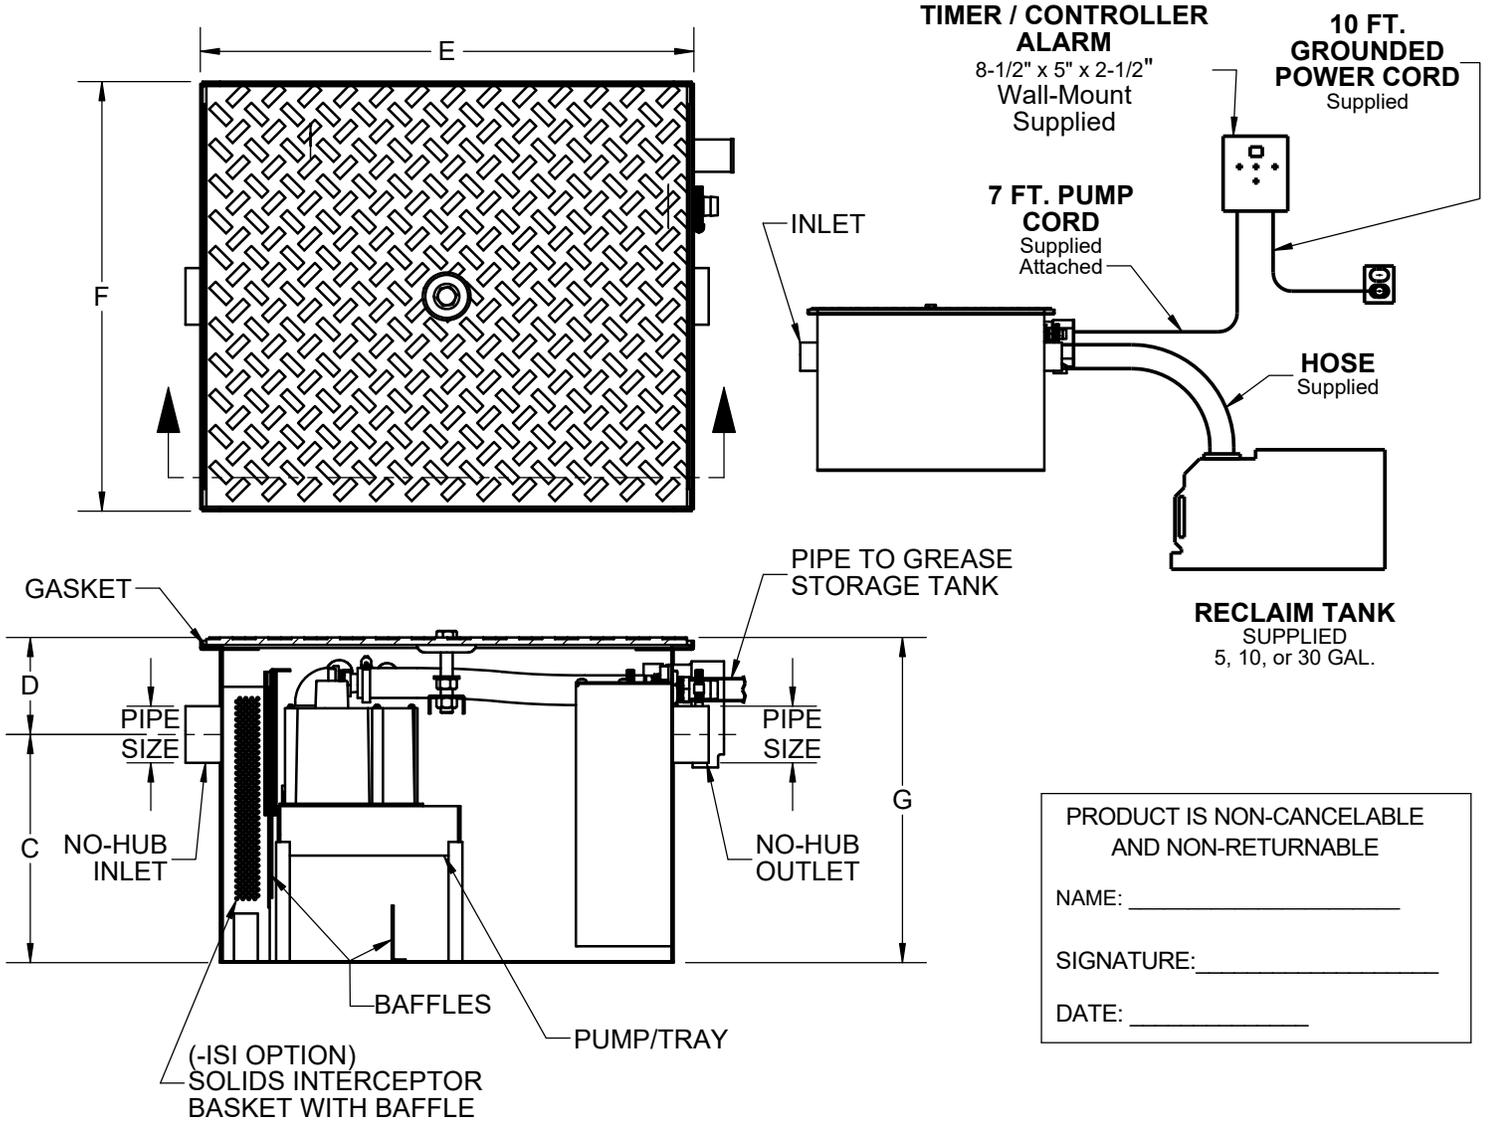

PRODUCT IS NON-CANCELABLE AND NON-RETURNABLE

NAME: _____

SIGNATURE: _____

DATE: _____

-40	COVER RECESS FOR FLOOR FINISH
-61	FLANGE AND CLAMP DEVICE
-EXT	EXTENSION, 6" STANDARD (SPECIFY EXTENSION HEIGHT)

-AC	ALUMINUM COVER (N/A WITH -40, -HD)
-HD	HEAVY-DUTY COVER
-SS	STAINLESS STEEL INTERCEPTOR
-ISI	SOLIDS INTERCEPTOR BASKET

TYPE	FLOW RATE	CAP. (LBS.)	PIPE SIZE	C	D	E	F	G
*60104H-GRD	15	30	2	9-1/2	3-3/8	20-3/8	17	12-7/8
*60105H-GRD	20	40	3	12	4-7/8	20-7/8	19	16-7/8
*60106H-GRD	25	50	3	13	4-7/8	23-3/8	21-1/2	17-7/8
**60107H-GRD	35	70	3	14-1/2	4-7/8	26-1/8	23	19-3/8
**60108H-GRD	50	100	3	16-1/2	4-7/8	27-7/8	25-1/2	21-3/8
***60109H-GRD	75	150	3	21	6	41	31	27
***60110H-GRD	100	200	4	23	8	47	35	31

* 5 Gal. Tank ** 10 Gal. Tank *** 30 Gal. Tank

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DATE OF LAST CHANGE: 07/21/21

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.



NOTES