

**SPECIFICATION:**

JOSAM 60110A-SA SERIES EPOXY COATED FABRICATED STEEL SEMI-AUTOMATIC GREASE INTERCEPTOR, SHALLOW TYPE, THREADED CONNECTIONS, INTERNAL AIR-RELIEF, VISIBLE DOUBLE WALL TRAP, REMOVABLE BAFFLE, GASKETED NON-SKID COVER GREASE RECOVERY CONE, FLEXIBLE HOSE, GREASE DRAW-OFF VALVE AND FLOW CONTROL FITTING.



**GREASE INTERCEPTOR**

SEMI-AUTOMATIC  
SHALLOW TYPE

SERIES **60110-SA**

FORMERLY 60110-50A SERIES

**NOTE:** HEIGHT OF 13" [330] REQUIRED FROM TOP OF INTERCEPTOR TO BOTTOM OF FIXTURE.

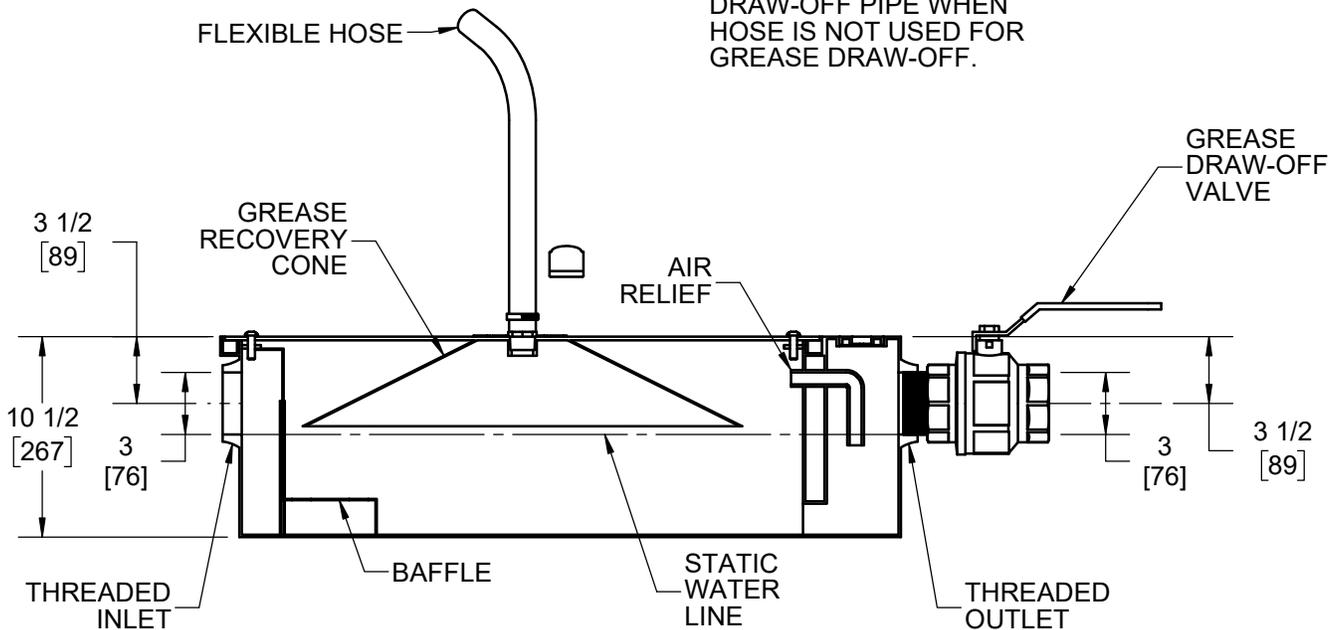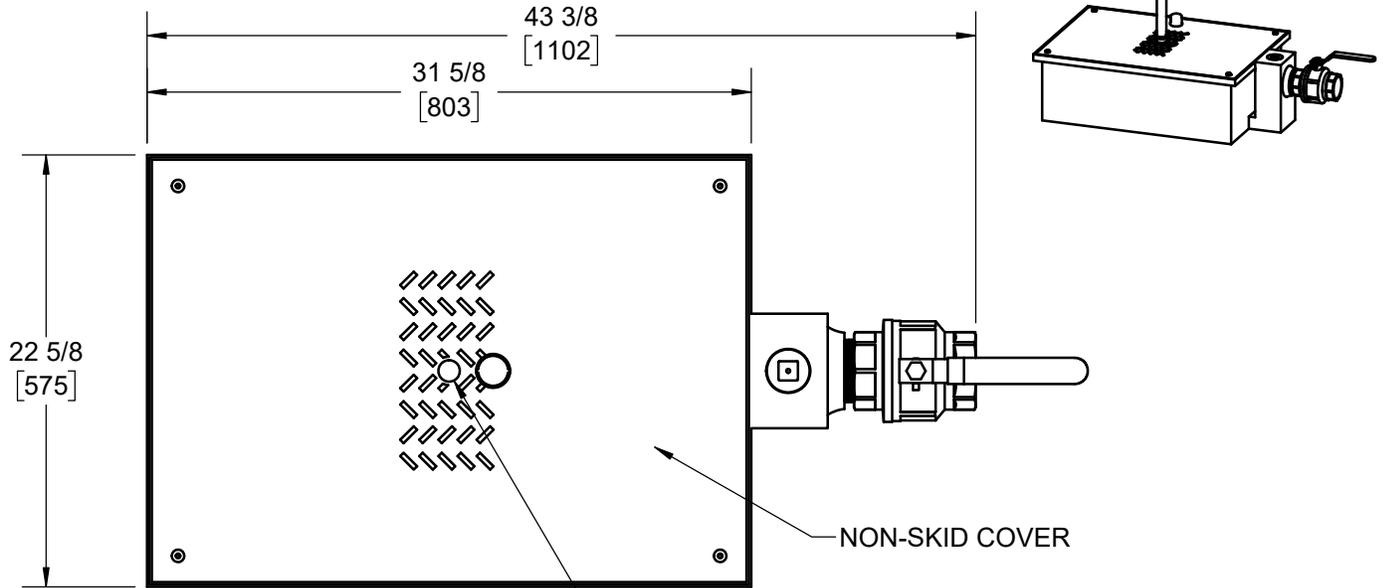

-65	HUB INLET, SPIGOT OUTLET 2"
-66	HUB INLET, SPIGOT OUTLET 3"
-85	ENZYMATIC PORT IN COVER

TYPE	FLOW RATE	CAPACITY
60115-SA	35 GPM [2.2 L/s]	70 lbs. [32 kg]

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DATE OF LAST CHANGE: 06/15/21

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

**JOSAM**

MICHIGAN CITY, INDIANA

NOTES