


41630**SS Drain****12" Square Top, 6" Deep****Specification**

Josam series 41630 fabricated stainless steel (type 304, 14 GA), 12" square top, 6" deep, with no-hub bottom outlet, anchor tabs and perforated SS grate (standard).

STANDARD GRATE
FREE AREA = 42.3 IN²
MEETS ADA AND HEEL-PROOF REQS.

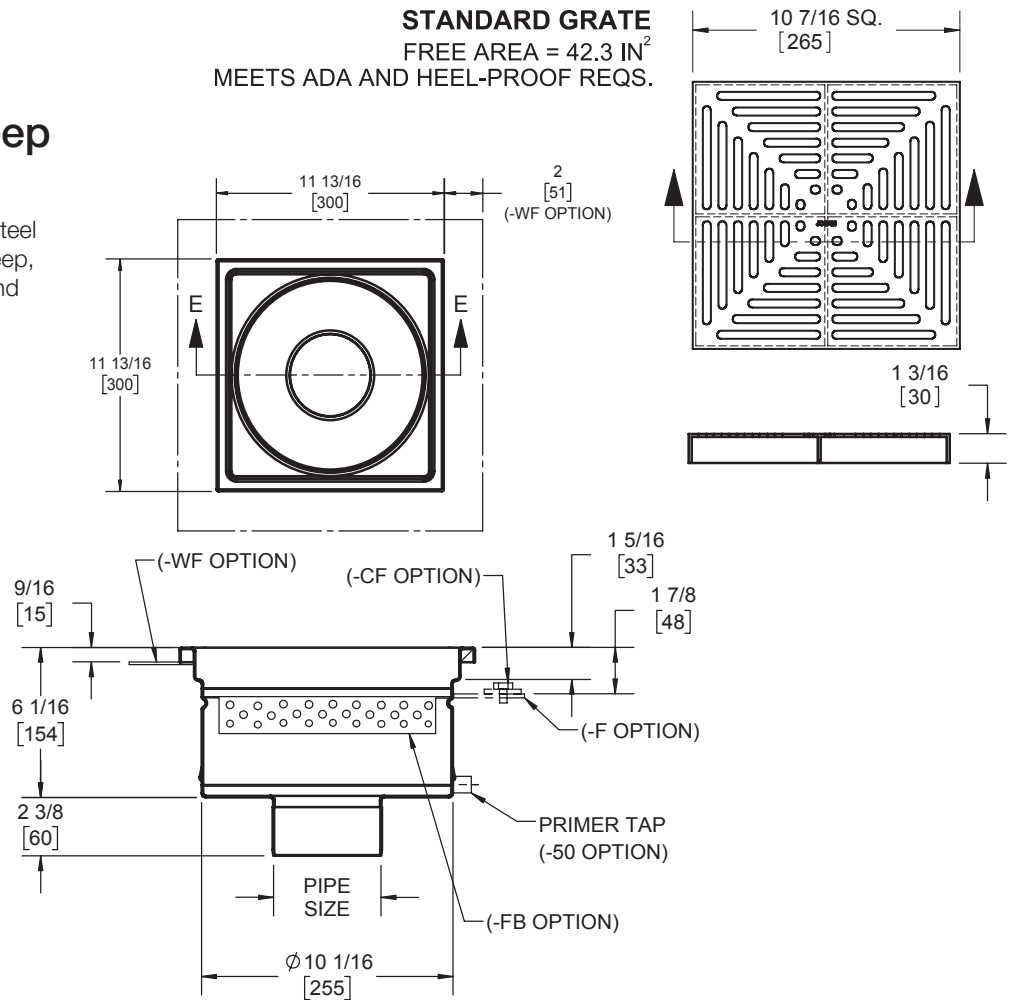

-WH	Weepholes (1 per side, ϕ 1/8")
-NB	Nickel bronze rim & grate (*add 0.5")
-FB	Filter basket
-SB	Sediment bucket
-VP	Secured grate
-50	1/2" primer tap
-BW	Butt-weld outlet (spec. 10, 40, 80)
-T	Threaded outlet
-PFO	Push-Fit outlet size
-DB	Dome bottom strainer
-WF	2" wide flange

-F	Flange
-CF	Clamp and flange
-NG	No grate
-HG	Perf. Half grate
-3Q	Perf. 3/4 grate
-MG	Mesh, anti-slip grate
-LG	Ladder grate
-SG	Perimeter slot grate
-SPG	Slotted plate grate
-316	Type 316L material

Model	Pipe size
41633	3"
41634	4"
41636	6"

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes: