

SPECIFICATION:




JOSAM 23710-IRMA SERIES COATED CAST IRON ROOF DRAIN, ROUND PEDESTRIAN GRATE SET IN SQUARE SECURED FRAME, NON-PUNCTURING FLASHING COLLAR WITH WEEPHOLES FOR ROOF FILL, MEDIUM SUMP WITH WIDE ROOF FLANGE, BOTTOM OUTLET, AND PERFORATED IRMA EXTENSION.

ROOF DRAIN
MEDIUM SUMP, PROMENADE TOP
WITH SS PERF EXTENSION

SERIES 23710-IRMA

SLOT WIDTH 1/4"
 GRATE FREE AREA: 22.8 SQ IN

THIS DRAIN IS COMPLIANT WITH THE ANSI/ASME STANDARD A112.6.3-2001 FOR HEEL-RESISTANT STRAINERS AND THE MAXIMUM GRATE SLOT SIZE TO BE 5/16" (8mm)

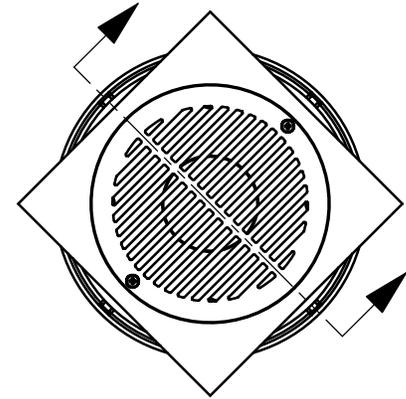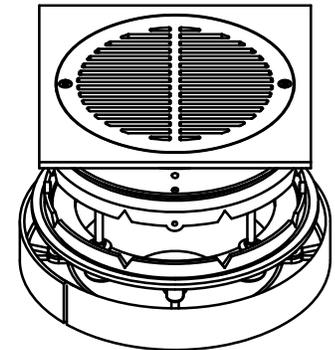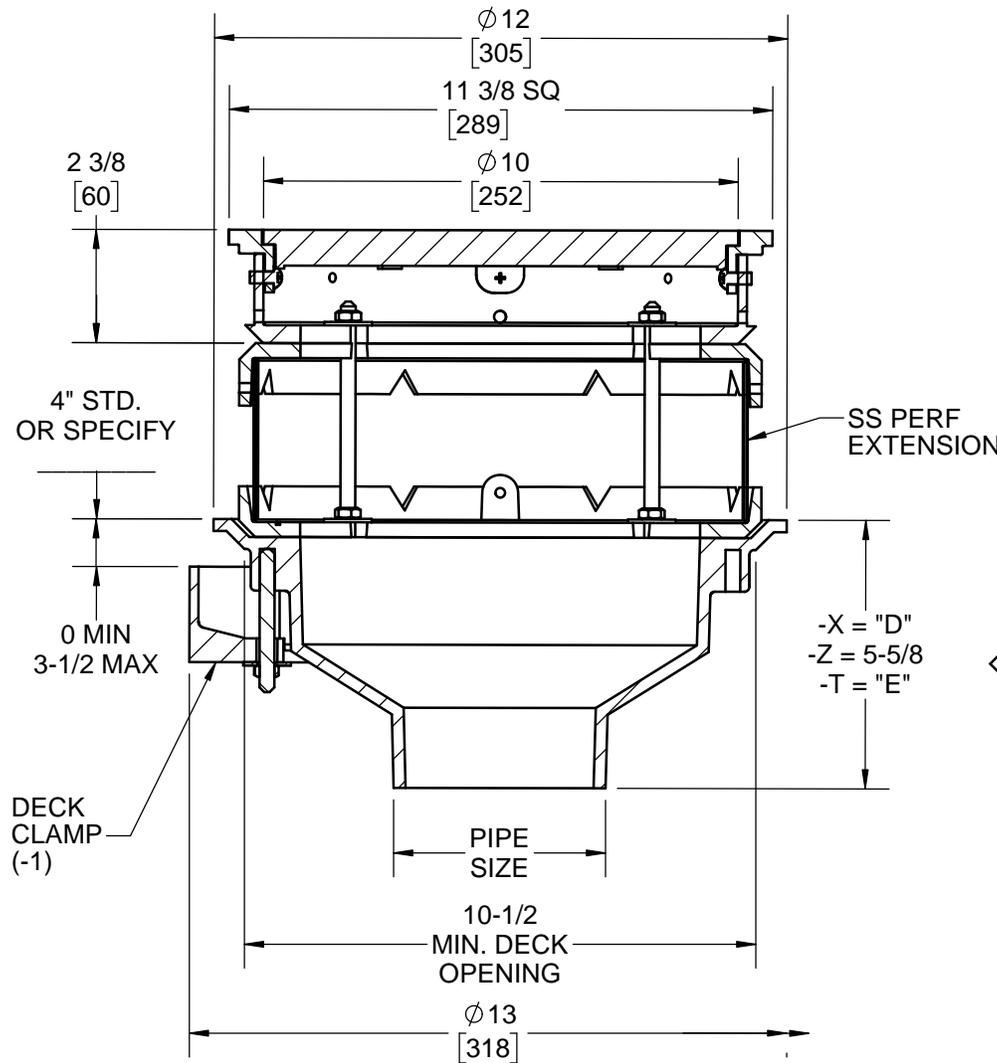

TOP VIEW

** -12 EXTENSION 1" STANDARD

2"	PIPE SIZE [DIM "D" = 4 3/4", DIM "E" = 6 1/4"]	-1	DECK CLAMP ASY.
3"	PIPE SIZE [DIM "D" = 4 3/4", DIM "E" = 6 1/4"]	-1C	DRAIN RECEIVER CLIPS (MIN. DECK OPENING ϕ 13.75")
4"	PIPE SIZE [DIM "D" = 4 1/2", DIM "E" = 6 1/4"]	-2	DRAIN RECEIVER
5"	PIPE SIZE [DIM "D" = 4 3/8", DIM "E" = 6"]	-3	DECK CLAMP ASY. AND DRAIN RECEIVER
6"	PIPE SIZE [DIM "D" = 4", DIM "E" = 5 3/4"]	-3C	DRAIN RECEIVER AND DRAIN RECEIVER CLIPS
		-12	EXTENSION FLASHING COLLAR, CAST IRON (SPECIFY HEIGHT **)
-X	INSIDE CAULK OUTLET	-20	GALVANIZED CAST IRON PARTS
-Z	NO-HUB SPIGOT OUTLET	-50	SATIN FINISH NIKALOY TOP
-T	THREADED OUTLET	-51	SATIN FINISH BRONZE TOP
		-66	NO-HUB SIDE OUTLET
		-VP	SECURED GRATE, VANDAL-PROOF SCREWS

DATE OF LAST CHANGE: 12/17/19

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

JOSAM
 MICHIGAN CITY, INDIANA

NOTES

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov