

**SPECIFICATION:**




JOSAM 23710-12 SERIES COATED CAST IRON ROOF DRAIN, EXTENDED COLLAR, ROUND PEDESTRIAN GRATE SET IN SQUARE SECURED FRAME, NON-PUNCTURING FLASHING COLLAR WITH WEEPHOLES FOR ROOF FILL, MEDIUM SUMP WITH WIDE ROOF FLANGE AND BOTTOM OUTLET.

**ROOF DRAIN**

MEDIUM SUMP, PROMENADE TOP, EXTENDED COLLAR

SERIES **23710-12**


SLOT WIDTH 1/4  
 ADA AND HEEL-PROOF COMPLIANT  
 GRATE FREE AREA: 22.8 IN<sup>2</sup>

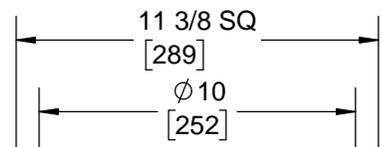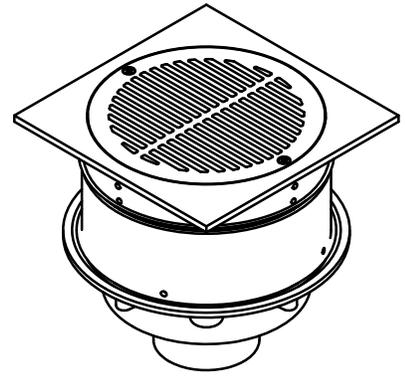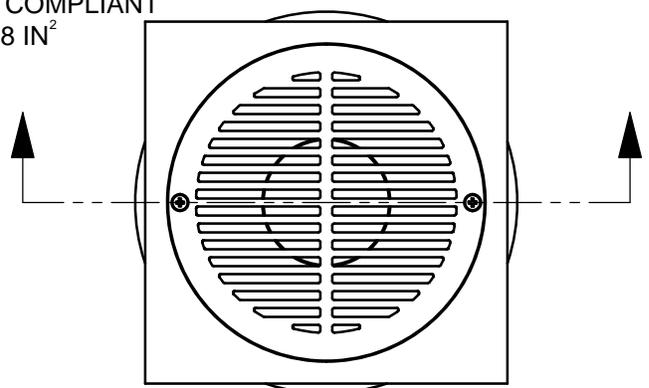

WEEPHOLES

0 MIN  
 3-1/2 MAX

DECK CLAMP (Ø 13)  
 (-1 OPTION)

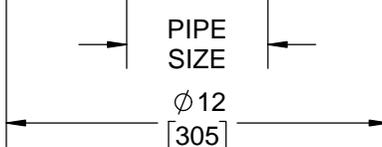

EXTENSION (-12 OPTION)  
 (SPECIFY HEIGHT)

NOTE:  
 EXTENSION MAY COME AS  
 MULTIPLE PIECES DEPENDING  
 ON EXTENSION HEIGHT  
 SPECIFIED

2  
 [51]  
 23710 STANDARD HEIGHT

-X = "D"  
 -Z = 5-5/8  
 -T = "E"

\*\* -12 EXTENSION 1" STANDARD

	2"	PIPE SIZE [ DIM "D" = 4 3/4", DIM "E" = 6 1/4" ]			-1	DECK CLAMP ASY.
	3"	PIPE SIZE [ DIM "D" = 4 3/4", DIM "E" = 6 1/4" ]			-1C	DRAIN RECEIVER CLIPS ( MIN. DECK OPENING Ø 13.75" )
	4"	PIPE SIZE [ DIM "D" = 4 1/2", DIM "E" = 6 1/4" ]			-2	DRAIN RECEIVER
	5"	PIPE SIZE [ DIM "D" = 4 3/8", DIM "E" = 6" ]			-3	DECK CLAMP ASY. AND DRAIN RECEIVER
	6"	PIPE SIZE [ DIM "D" = 4", DIM "E" = 5 3/4" ]			-3C	DRAIN RECEIVER AND DRAIN RECEIVER CLIPS
				X	-12	EXTENSION FLASHING COLLAR, CAST IRON ( SPECIFY HEIGHT ** )
	-X	INSIDE CAULK OUTLET			-20	GALVANIZED CAST IRON PARTS
	-Z	NO-HUB SPIGOT OUTLET			-50	SATIN FINISH NIKALOY TOP
	-T	THREADED OUTLET			-51	SATIN FINISH BRONZE TOP
					-66	NO-HUB SIDE OUTLET
					-VP	SECURED GRATE, VANDAL-PROOF SCREWS

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DATE OF LAST CHANGE: 6/27/18  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS  
 TOLERANCES AND CHANGE WITHOUT NOTICE.  
 WE CAN ASSUME NO RESPONSIBILITY FOR  
 USE OF SUPERSEDED OR VOID DATA.

**JOSAM**  
 MICHIGAN CITY, INDIANA

NOTES